

PREMIUM WOOD BURNING FIREPLACES

FIREPLACE
XTORDINAIR





The 44 Elite™ is shown with the Classic Arch™ double door face.



Reimagine the (Heart)h of Your Home

NEXGEN-HYBRID™ TECHNOLOGY

Page 4

42 Apex NexGen-Hybrid™

Page 6

Powerhouse Heaters, Elegant Style

36 Elite NexGen-Hybrid™

Page 10

44 Elite NexGen-Hybrid™

Page 12

Elite NexGen-Hybrid™ Features

Page 14


Elite Faces

Page 15

Warranty, Firescreens, Manuals

Page 16



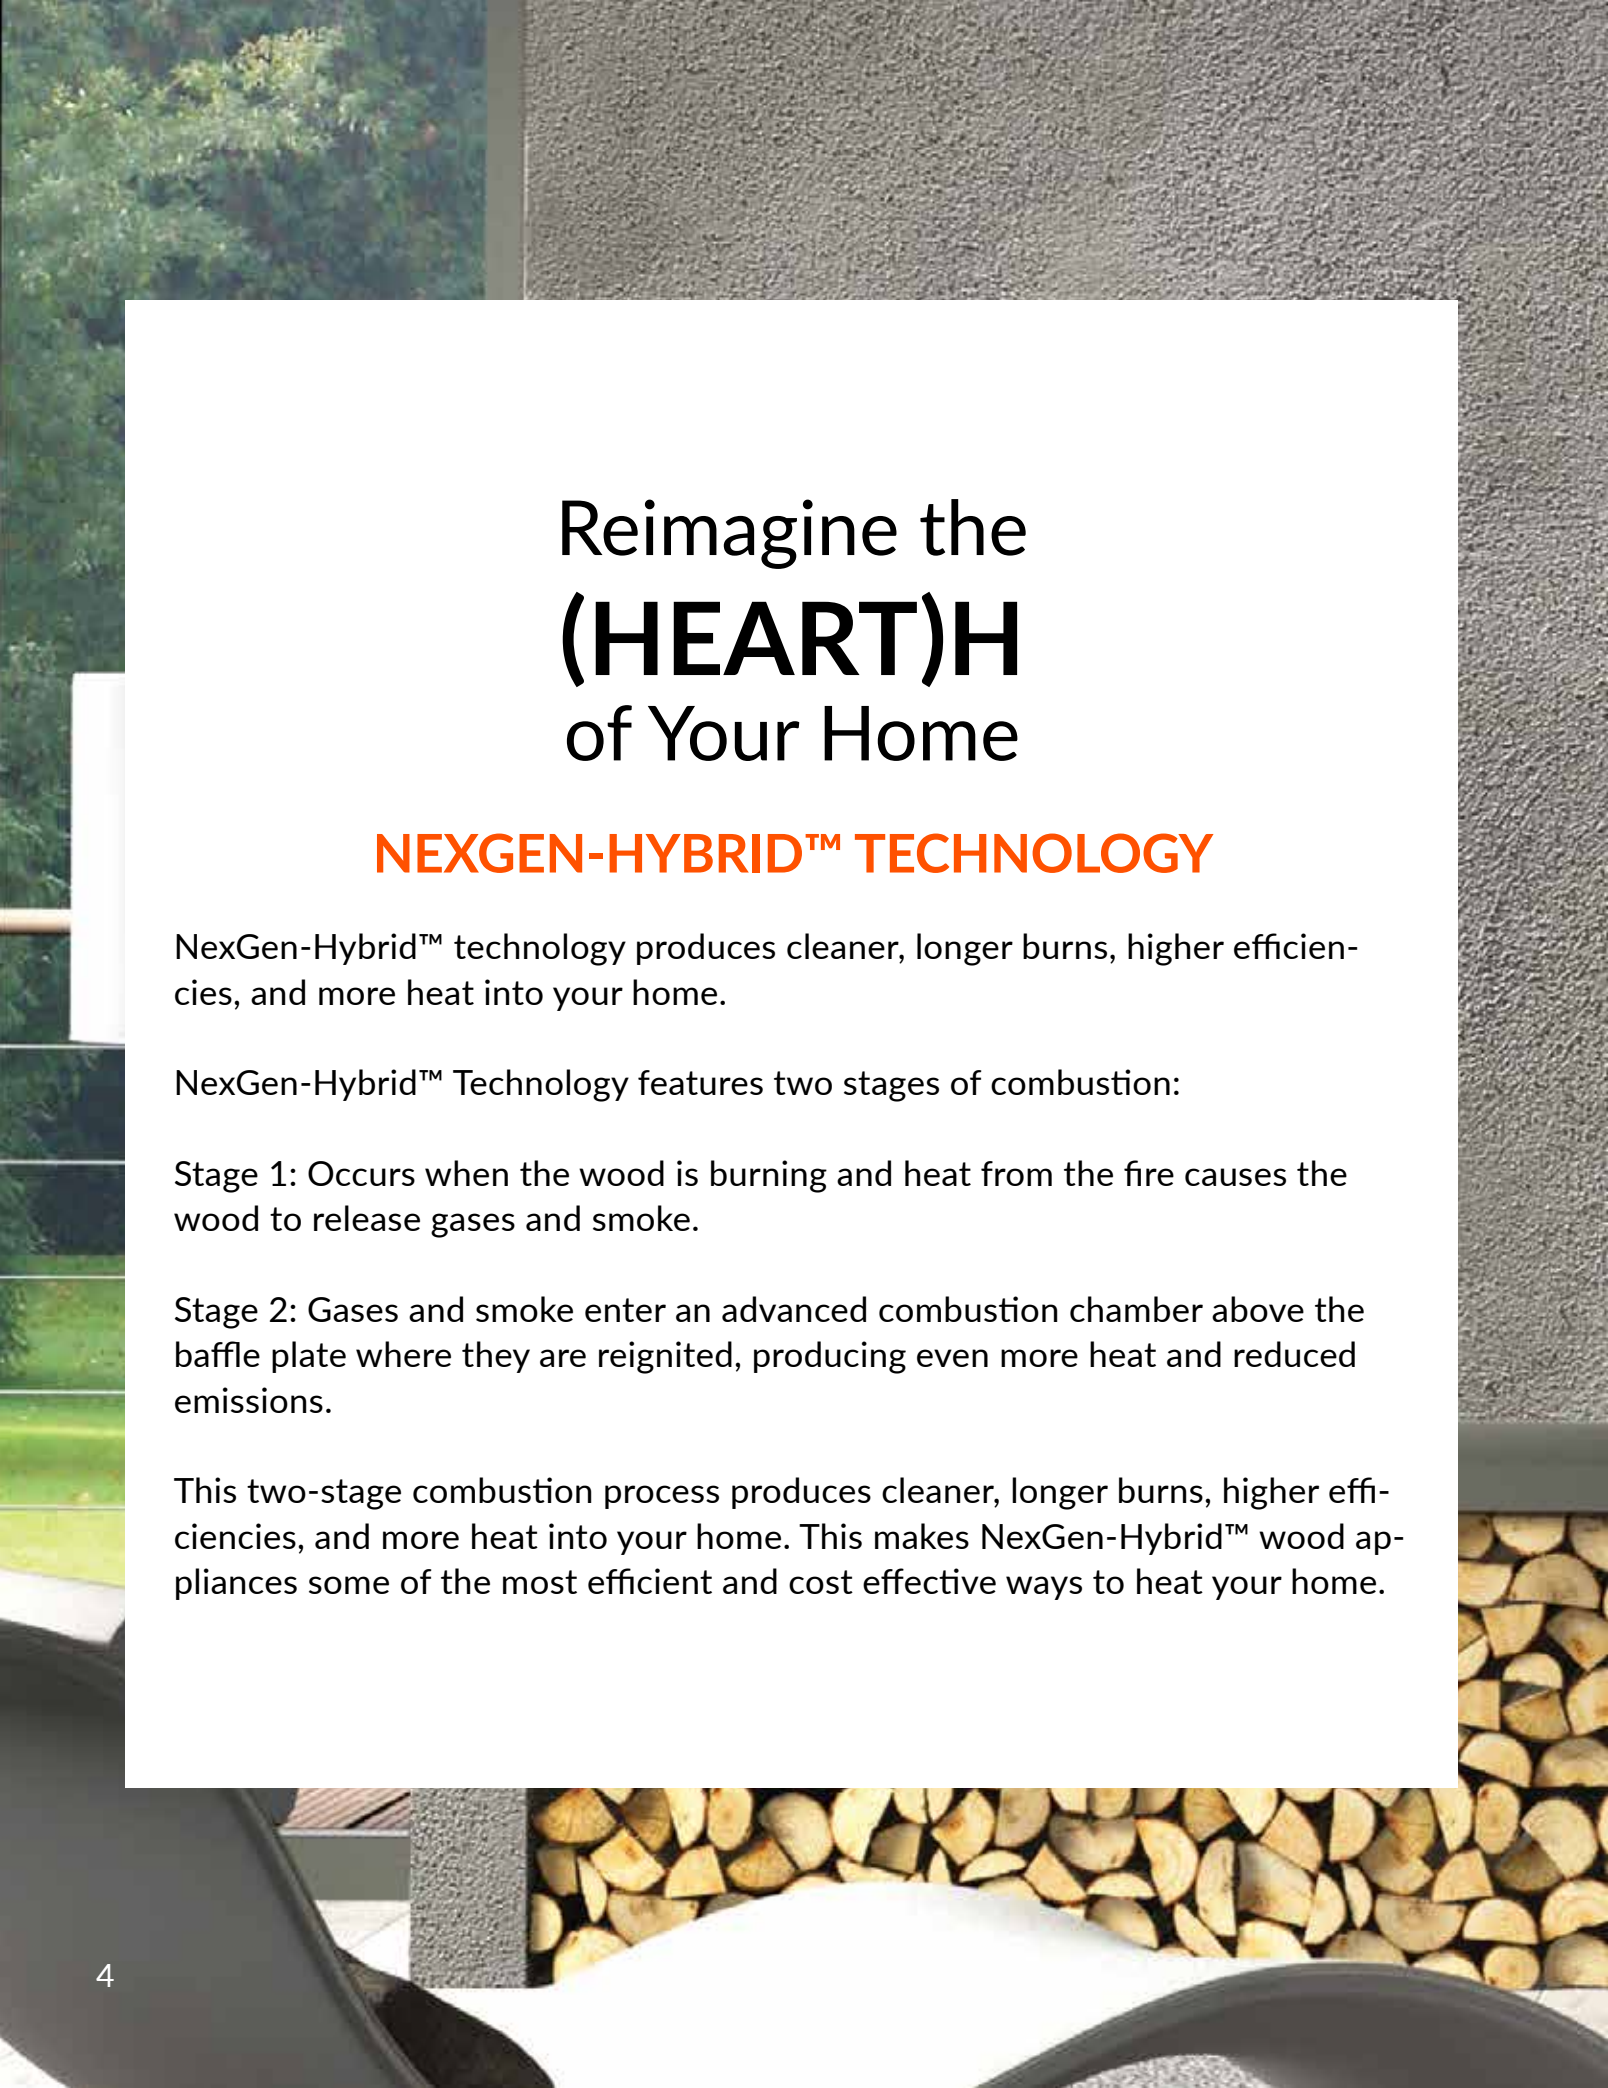

Reimagine the (HEART)H of Your Home

NEXGEN-HYBRID™ TECHNOLOGY

NexGen-Hybrid™ technology produces cleaner, longer burns, higher efficiencies, and more heat into your home.

NexGen-Hybrid™ Technology features two stages of combustion:

Stage 1: Occurs when the wood is burning and heat from the fire causes the wood to release gases and smoke.

Stage 2: Gases and smoke enter an advanced combustion chamber above the baffle plate where they are reignited, producing even more heat and reduced emissions.

This two-stage combustion process produces cleaner, longer burns, higher efficiencies, and more heat into your home. This makes NexGen-Hybrid™ wood appliances some of the most efficient and cost effective ways to heat your home.



The 42 Apex NexGen-Hybrid™ is shown with the Metropolitan™ face.

42 Apex NexGen-Hybrid™

The 42 Apex NexGen-Hybrid™ is designed to deliver high-performance, clean-burning heat while showcasing a spectacular view of the fire. Express your personal style with one of the three designer faces, like the hand-crafted Timberline™ to the right.

Heating Capacity:*	Up to 2,500 square feet
Maximum Burn Time:	Up to 14 hours
Log Length:	24"
EPA Tested BTU Range:**	7,660 to 40,275 BTUs/Hr (Crib Wood)
Maximum BTU Output:	13,500 to 50,000 BTUs/Hr (Cord Wood)
Emissions:**	1.2 grams/particulate per hour
Overall Efficiency:	Up to 77.2%
Firebox:	3.18 cubic feet
Weight:	670 Lbs.
Glass Viewing Area:	25-5/8" W x 12-7/8" H
Bypass Damper	Standard

* Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.

** This heater meets the 2020 U.S. EPA's crib wood emission limits for wood heaters. Tested to ASTM E2780-10, ASTM 2515-11, CSA B415.1-10



Watch
Me Burn

The 42 Apex NexGen-Hybrid™ is shown with
the Timberline™ face

A FACE FOR EVERY SPACE

The 42 Apex NexGen-Hybrid™ fireplace has three faces designed to enhance your personal architectural style:



UNIVERSAL™

Timeless motif for enduring elegance will complement decades of changing styles.



METROPOLITAN™

Detailed grill work exuding alluring curves which effortlessly blends with other classic design elements.



TIMBERLINE™

Hand-crafted with exemplary artistry and pairs well with bold statement pieces. Each individual face takes more than 10 hours to forge.

MULTI-USE TOOL

Your 42 Apex NexGen-Hybrid™ comes with a useful tool that allows you to adjust your air control, open and close your bypass damper, and access the loading door.



IN-WALL CONTROL CENTER

The 42 Apex NexGen-Hybrid™ fireplace features an In-Wall Control Center, the first in the industry to combine a digital catalytic temperature readout and a slide rheostat for the standard fan. This user-friendly device combines your fireplace controls into one simple, sleek design and can easily be mounted and integrated into the wall.



IN-WALL CONTROL CENTER - Operation

1. The slide rheostat can be adjusted to maximize convection output from your fan, or it can turn the fan completely off when low, gentle warmth is desired.
2. The digital temperature should read above 500 degrees Fahrenheit*, which means the catalytic combustor is engaged and you are burning a clean, efficient fire.
3. With the optional GreenStart® feature you simply load the wood and push a button to have a roaring fire in minutes!

**Fahrenheit temperature can easily be changed to Celsius.*



Use your Smart Phone QR Reader to watch a video on the 42 Apex NexGen-Hybrid™ wood fireplace

GREEN START®

PUSH-BUTTON STARTUP. THE GREATEST WOOD FIREPLACE OPTION EVER!

With a push of the GreenStart® button, super-heated air (1400°F) starts your 42 Apex NexGen-Hybrid™ in a New York minute. You can also use the GreenStart® Igniter when adding new wood or refreshing your fire after an overnight burn. Your fireplace door stays closed during startups; no more smoky starts, no more slow starts. Anyone can do it!



36 Elite NexGen-Hybrid™

The 36 Elite NexGen-Hybrid™ combines elegant style with high performance heat to bring you an excellent home heater for large spaces up to 2,500 square feet. This unit is made from heavy-gauge steel with unibody construction and features a remote-mounted 388 CFM fan for Posi-Pressure heat distribution throughout your home. See page 14 for details.

Heating Capacity*:	Up to 2,500 square feet*
Maximum Burn Time:	Up to 12 hours
Log Length:	24"
EPA Tested BTU Range**:	10,733 to 47,514 BTUs/Hr.
Cord Wood Tested BTUs:	17,500 to 70,000 BTUs/Hr.
Emissions:	0.6 grams/particulate per hour (Crib Wood)
Efficiency:***	79.5% HHV
Firebox:	3.13 cubic feet
Glass Viewing Area:	Ceramic Glass, Double Door: 11-1/4" W x 14-1/2" H (each side), 300.6 Sq. In. Ceramic Glass, Single Door: 25-1/4" W x 14-1/2" H, 319.7 Sq. In.
Bypass Damper	Standard

* Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.

** EPA tests to determine BTU output are achieved with a single load of wood at each burn rate. At home, you are likely to add more wood to your stove to maintain your desired comfort level. By the simple process of loading your stove with additional wood, you could achieve up to a 20% higher heat output than established during EPA testing.

***This heater meets the 2020 U.S. EPA's crib wood emission limits for wood heaters. Tested to EPA ASTM E2780-10, ASTM 2515-10, CSA B415.1-10.



The 36 Elite NexGen-Hybrid™ is shown with Classic Arch™ Face with Black Painted Double Door.



Watch
Me Burn

44 Elite NexGen-Hybrid™

The 44 Elite™ has the largest firebox available in its class. The massive viewing area is sure to please in any great room. This unit is made from heavy-gauge steel with unibody construction and features a remote-mounted 388 CFM fan for Posi-Pressure heat distribution throughout your home. See page 14 for details.

Heating Capacity:*	Up to 3,000 square feet
Maximum Burn Time:	Up to 14 hours
Log Length:	32 inches
EPA Tested BTU Range**:	12,016 - 54,510 (crib wood)
Cord Wood BTU Range:	12,500 - 78,000 (cord wood)
Emissions:	1.1 grams per hour (crib wood)
Efficiency:***	81.3% HHV
Firebox:	4.2 cubic foot
Ceramic Glass Viewing Area:	Double Door: 14-3/8" W x 18-1/4" H (each side), 473.6 sq. in.
Bypass Damper	Standard

* Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.

** EPA tests to determine BTU output are achieved with a single load of wood at each burn rate. At home, you are likely to add more wood to your stove to maintain your desired comfort level. By the simple process of loading your stove with additional wood, you could achieve up to a 20% higher heat output than established during EPA testing.

***This heater meets the 2020 U.S. EPA's crib wood emission limits for wood heaters. Tested to EPA ASTM E2780-10, ASTM 2515-10, CSA B415.1-10.



Watch
Me Burn

The 44 Elite NexGen-Hybrid™ is shown with the Classic Arch™ Face with Double Black Painted Door.

The Elite™ Models

Powerhouse Heaters, Elegant Style


Elite™ Fireplaces Are More Than Just A Name

More than two decades ago, the FireplaceX® Elite™ models brought about the Original Arched Fireplace, a trademark product shape of an arched door and parallel arched face. FireplaceX® Elite™ fireplaces use fresh air drawn from outside the home, for both combustion and heat transfer through a unique concept called “Posi-Pressure.” The arched design conceals the air intake and heat exchanger, while the arches have identified FireplaceX® to thousands of discerning homeowners all over North America. Only FireplaceX® creates such a beautiful, versatile look in a high BTU output fireplace.

Posi-Pressure Heating System

One of the unique design features of FireplaceX® Elite™ fireplaces is that you can use fresh air which is drawn from outside the home for both combustion and heat transfer through a unique concept called “Posi-Pressure.”

Posi-Pressure technology draws outside air into the cavity around the fireplace and heats it, then circulates it throughout the home via a quiet, remote blower. The heated air naturally “seeks out” and penetrates cold spaces, warming the entire home evenly while “sealing” cracks, leaks and other drafty spots by preventing cold air infiltration.

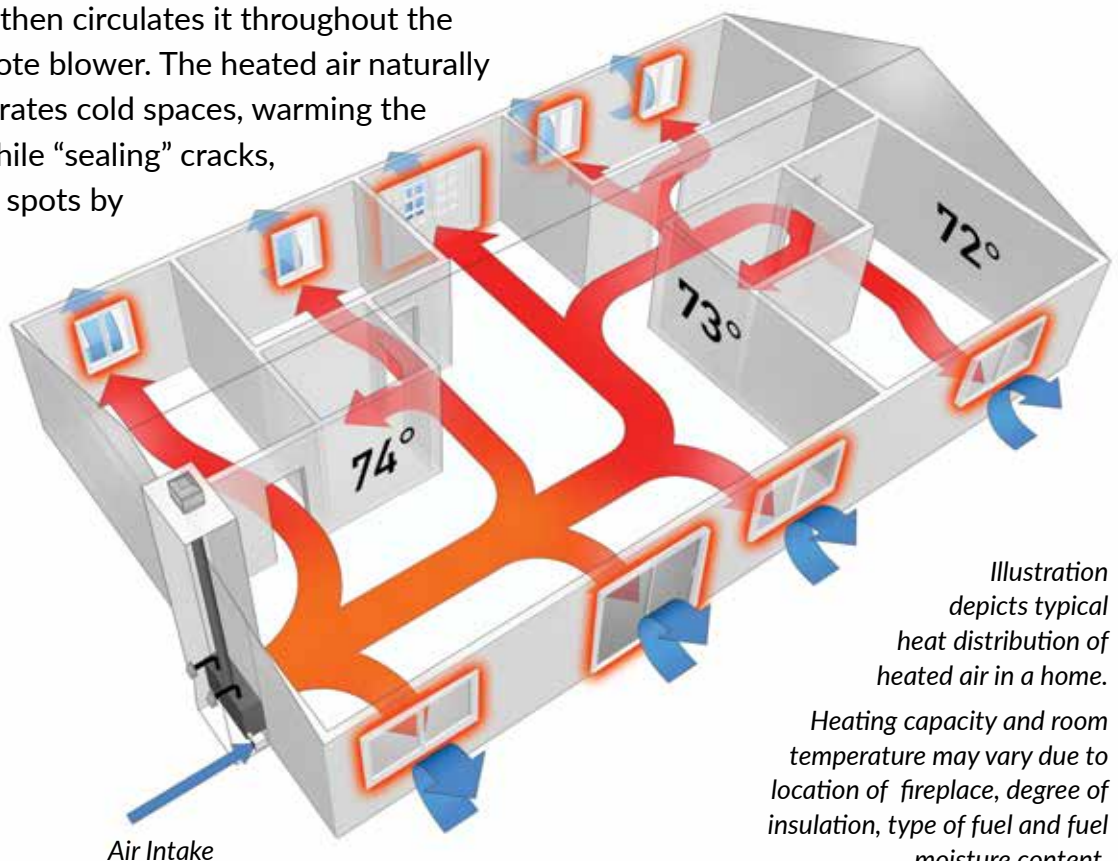


A Face and Door for Every Space

CLASSIC ARCH™ FACES & DOORS

The Classic Arch™ door style is equally charming at home in the country or gracing a contemporary living room. The warm black finish complements any decor and is timelessly enchanting.

ARTISAN™ HAND-HAMMERED FACES & DOORS

Artisan™ faces are part of our Custom Shop collection of hand-crafted designs. These faces are reminiscent of the iron work in the great lodges of Europe and North America. Hand-forged by master blacksmiths, each face takes more than 12 hours to craft and bears unique characteristics, making it a true work of art.

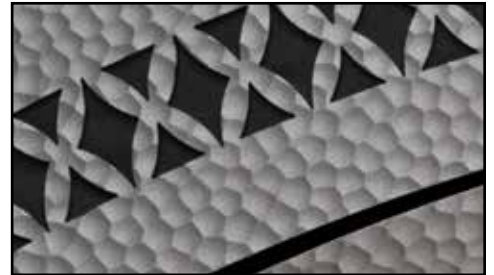

36 ELITE™ FACE/DOOR CHOICES



Classic Arch™ black double door



Classic Arch™ black single door



Artisan™ single door

44 ELITE™ FACE/DOOR CHOICES



Classic Arch™ black double door



Artisan™ double door

WARRANTY

Your wood burning fireplace is backed by a network of specialty hearth dealers and certified factory-trained installers. FireplaceX® warranties our products to be free from defects in material and workmanship for a period of seven years from date of purchase. All parts, electronics and labor are covered for a full two years. No other manufacturer's warranty can compare.



FIRE SCREENS



If you have young children or pets in your home, consider installing a fire screen. Make sure the fire screen is tall enough and placed far enough away so that reaching arms can't touch the surface of the fireplace. This will allow everyone in your home to safely enjoy the comfort and warmth of your new fireplace.

INSTALLATION MANUALS

42 APEX NEXGEN-HYBRID™



36 ELITE NEXGEN-HYBRID™



44 ELITE NEXGEN-HYBRID™



@FireplaceX

@FireplaceXtrordinair

@FireplaceXtrordinair

Manufactured By Travis Industries, Inc.
Mukilteo, Washington

Visit us online: www.fireplacex.com



Fireplace Xtrordinair® Wood Burning Fireplaces are protected by one or more of the following patents: U.S. 9,170,025, 4,665,889 as well as other U.S. and Foreign Patents pending. Fireplace Xtrordinair® reserves the right to alter or improve its products at any time without notification. All trademarks belong to Travis Industries, Inc. For installation specifications refer to the Owner's Manual found on the Fireplace Xtrordinair® website. © Copyright T. I. 2026/02 - Printed in the U.S.A. 98800160