


42 APEX WOOD BURNING FIREPLACES


FIREPLACE

XTRORDINAIR



42 Apex™

The 42 Apex™ is designed to deliver high-performance, clean-burning heat while showcasing a spectacular view of the fire. Employing state of the art catalytic technology allows our large capacity wood fireplace to produce highly efficient, clean fires in all burn settings. This bulletproof technology achieves roaring fires with long burn times and very high BTUs ranges, making the 42 Apex the perfect powerhouse home heater.

This fireplace features flexible installation parameters that allow for easy installation virtually anywhere in your home. It also includes the optional GreenStart™ Igniter that starts your fire with the push of a button! Learn more about this option by scanning the QR code below. This model is ideal for new construction, remodels, or a tear-out replacement of your existing fireplace.

Express your personal style with one of the three designer faces, like the hand-crafted Timberline™ face (shown on the next page), the Universal™, or Metropolitan™ faces below.



UNIVERSAL™

Timeless motif for enduring elegance will complement decades of changing styles.



METROPOLITAN™

Detailed grill work exuding alluring curves which effortlessly blend with other classic design elements.



MULTI-USE TOOL

Adjust your air control, open and close your bypass damper, and access the loading door without the risk of accidentally touching the hot surface of the fireplace.

- Heating Capacity:* Up to 2,500 square feet
- Maximum Burn Time: Up to 12 hours
- Log Length: 24"
- EPA Tested BTU Range: 13,537 to 49,626 BTU's per hour
- "Real World BTUs": EPA tests to determine BTU output are achieved with a single load of wood at each burn rate. At home, you are likely to add more wood to your fireplace to maintain your desired comfort level. By the simple process of loading your fireplace with additional wood, you could achieve up to a 20% higher (60,000 BTU's) heat output than established during EPA certification testing.
- Emissions: 0.93 grams/particulate per hour (Cord Wood)
- Overall Efficiency:** Up to 73%
- Firebox: 3.5 cubic feet
- Weight: 808 Lbs.
- Viewing Glass: 25-5/8" W x 12-7/8" H, 328 sq. in.
- Fan: 400 CFM



Use your Smart Phone QR Reader to watch a video on the 42 Apex™ wood fireplace

*Heating Capacity will vary with floor plan, insulation and outdoor temperature.
**Tested and certified using cord wood to the EPA protocol method B415.1-10

EPA CERTIFIED

Using the EPA CORD WOOD protocol, rather than the CRIB WOOD protocol that most other manufacturers test to. By testing with CORD WOOD, you get a true real world measurement of how well the fireplace will burn and perform in your home.




The 42 Apex™ fireplace features an In-Wall Control Center to combine a digital catalytic temperature readout and a slide rheostat for the standard fan and even allows you to start your fire with the push of a button!




The 42 Apex™ is shown with the Timberline™ face

42 APEX™ INSTALLATION

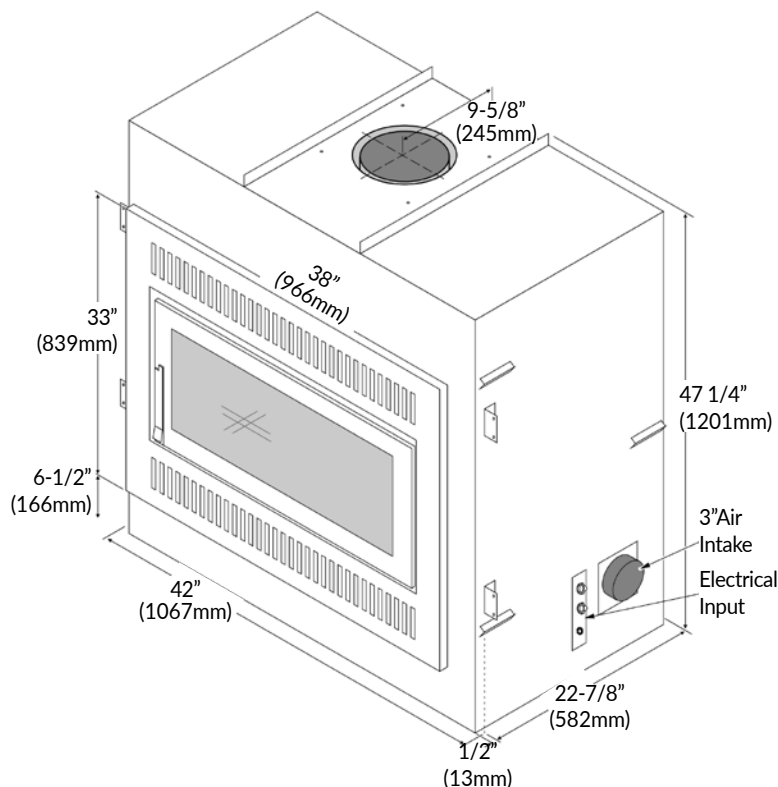

Framing

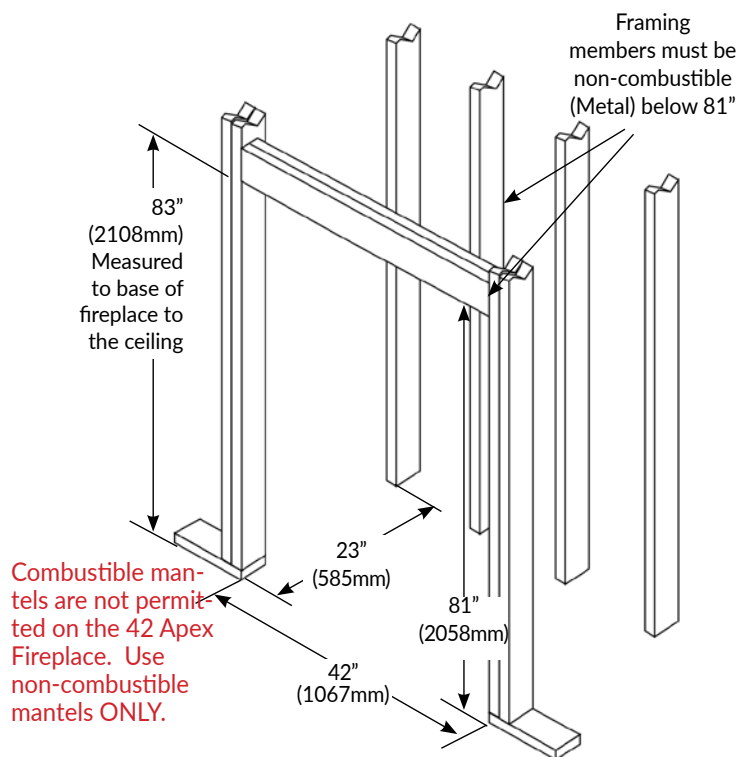

CLEARANCES TO COMBUSTIBLES

Sidewalls measured to the center line in front of fireplace.	45" (1143mm)
Side combustibles measured to the center line in front of fireplace that protrude less than 7" (178mm).	24-3/8" (620mm)
Combustibles placed in front or sides of the fireplace.	48" (1219mm)
Non-combustible Hearth Depth.	20" (508mm)

APPROVED CHIMNEY

AIR-COOLED - Use one of the following brands and series of air- CHIMNEY cooled chimney. Simpson DuraVent 8" x 12".

INSULATED CHIMNEY

- DuraVent DuraPlus HTC Chimney
- DuraVent DuraTech Premium DTP
- Duratech Canada
- ICC Excel 7"
- Security Oliver MacCloud S2100+ or

ASHT+SP

- Security S2100+ and ASHT+
- Selkirk CF Sentinel, Supervent 2100JM, SuperPro 2100 ALT and UltimateOne

TESTING

FireplaceX® Model 42 APEX™ is tested to U.L. 127-2015 and ULC-S610-M87

(R1998) standards by OMNI-Test Laboratories, Inc. Report # 028WF102S

Always refer to the Installation Manual for complete installation information.

WARRANTY

Your wood burning fireplace is backed by a network of specialty hearth dealers and certified factory-trained installers. FireplaceX® warranties our products to be free from defects in material and workmanship for a period of seven years from date of purchase. All parts, electronics and labor are covered for a full two years. No other



@FireplaceX
@FireplaceXtrordinair
@FireplaceXtrordinair

Manufactured By Travis Industries, Inc.
Mukilteo, Washington

Visit us online: www.fireplacex.com

Fireplace Xtrordinair® Wood Burning Fireplaces are protected by one or more of the following patents: U.S. 9,170,025, 4,665,889 as well as other U.S. and Foreign Patents pending. Fireplace Xtrordinair® reserves the right to alter or improve its products at any time without notification. All trademarks belong to Travis Industries, Inc. For installation specifications refer to the Owner's Manual found on the Fireplace Xtrordinair® website.

© Copyright T. I. 2021/11 - Printed in the U.S.A. 988001057

